

Europäisches Patentamt
Eur p an Patent Offic
Offic européen des brevets



(11) **EP 1 176 821 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.01.2002 Bulletin 2002/05

(51) Int Cl.7: **H04N 5/765, H01R 29/00**

(21) Application number: **01305014.1**

(22) Date of filing: **08.06.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Pace Micro Technology PLC**
Shipley, West Yorkshire BD18 3LF (GB)

(72) Inventor: **Fielding, Victor**
Barnsley, South Yorkshire S72 0HZ (GB)

(30) Priority: **28.07.2000 GB 0018426**

(74) Representative: **Wood, Graham**
Bailey Walsh & Co, 5 York Place
Leeds LS1 2SD (GB)

(54) **Connector adaptor**

(57) The invention relates to the provision of electrical apparatus which has at least one printed circuit board on which electrical components are set out and a first format of connection type exposed to allow connection of further apparatus. The connections can be attached directly to further apparatus with the same connector format and allow transfer of data between further electrical apparatus or alternatively, at the time of manufacturing an adaptor can be provided which has connectors of the same format as those on the printed circuit board for connection with the said printed circuit board

and a series of output connectors of a different format which can be exposed for the selective connection thereto of phono or other format connectors. This therefore allows a common printed circuit board design to be used for electrical apparatus for sale in any market, regardless of the particular type of connectors which are used to connect the printed circuit board to other pieces of apparatus in that market and a decision to be made by the manufacturer at the time of manufacture as to whether or not to connect the adaptor dependent on the ultimate destination of the apparatus.

EP 1 176 821 A1

Description

[0001] The invention to which this application relates is a conversion means which allows connection between apparatus with different connector formats and in particular apparatus provided with what is known as a "phono" format connection and apparatus which is provided with a connector format which is known as a "scart" connector.

[0002] At the present time, it can be the case that although two items of apparatus could, in theory, be connected to perform a desired function, in combination, the same cannot be connected in practise because one item of apparatus requires the use of a connection means in a first format such as a phono connector and the second item of apparatus is provided with a connection means in a different format such as a "scart" connector and the two connector types and formats are incompatible. This therefore means that the apparatus cannot then be used together which can be frustrating for the owner of the apparatus, and especially if the owner or user has no particular knowledge of different connector types.

[0003] Scart connectors are a 21-way connector used to connect video equipment together. They comprise a male and a female parts, provided in respective parts of apparatus and a data cable for connection therewith. They are typically used in Europe and other countries to provide connections for apparatus utilising video input and output, audio input and output, RGB video and control signals. Such apparatus can include TV, VCR, satellite receiver, video cameras and home cinema apparatus. There are 20 pins in the male part, the 21st pin connection is the metal shell of the connector, to which the screening braid of the data cable connected thereto is connected.

[0004] A phono format connector is a 2 pole connector used for audio applications typically in the US and other US influenced markets. The connectors comprise a male plug and female socket and are designed such that the centre pin of the plug which carries the data signal is enclosed by the outer ground connection to ensure it is screened. Each phono connector typically only carries one audio channel — stereo applications use one connector for the left and one for the right channel.

[0005] Typical applications include, Hi-Fi interconnecting of apparatus; disco/professional equipment connections between audio and/or video equipment; speaker connections and the like.

[0006] It is typically found that apparatus which is manufactured for the market place in Europe, use scart connectors for interconnecting video and audio signal carrying apparatus. In markets such as the Americas and Australia, phono connectors are used.

[0007] Conventionally, in order to allow an item of apparatus to be converted from a say European SCART format connector to a US phone format connector use or vice versa, differently formatted printed circuit boards are required to be produced for insertion in the appara-

tus housing for the different marketplaces. This therefore means that for each product the manufacturer is typically required to have two different printed circuit board configurations to allow the reception of phono or scart connectors as required. This can be expensive, time consuming and may cause faults to be introduced which were not previously in the other printed circuit board design.

[0008] The aim of the present invention is to allow a common printed circuit board to be used for all apparatus, regardless of the market, and hence type of connector required to be used, thereby overcoming the need for a new circuit board to be created for each connector format.

[0009] In a first aspect of the invention there is provided electrical apparatus for the processing of video and/or audio data and which apparatus includes a printed circuit board carrying processing components thereon, the printed circuit board is provided with at least one scart connection for the connection of further apparatus thereto and for the transfer of data between said apparatus, and characterised in that there is provided for selective attachment to the scart connection, an adaptor, said adaptor provided with at least one scart connector for connection with the said apparatus, and at least one output connection for the selective connection thereto of phono and/or other format connectors for mutual engagement.

[0010] In accordance with the invention, a common printed circuit board or printed circuit boards in the apparatus housing can continue to be used for all markets, regardless of the connector type used. This reduces the development and production costs to the manufacturer. It also reduces the time to market for products that are required to be sold in various market places and this can be achieved by the selective use of the adaptor as herein described. The invention also increases the adaptability of the apparatus and hence reduces the frustration and irritation experienced by the apparatus owner conventionally, when they cannot connect their apparatus together due to different connector formats.

[0011] In one embodiment the apparatus is a broadcast data receiver and the printed circuit board of the same and the adaptor include two or more scart connectors for mutual engagement.

[0012] The printed circuit board and adaptor if used are typically provided as part of the apparatus within a housing which forms the external surface of the apparatus.

[0013] In one embodiment when the adaptor is not attached to the printed circuit board the at least one scart connector of the printed circuit board is exposed externally of the apparatus to allow the attachment of scart connectors for other apparatus thereto by the user.

[0014] In another embodiment when the adaptor is attached to the printed circuit board the at least one connector of the different format on the adaptor is exposed externally of the apparatus to allow the attachment of

suitable format connectors thereto.

[0015] Typically, when attached to the printed circuit board, the adaptor is mounted in a plane perpendicular to the printed circuit board.

[0016] Typically the adaptor is positioned at the rear of the apparatus.

[0017] If required the adaptor can include connector outputs of more than one further format.

[0018] In a further aspect of the invention there is provided electrical apparatus for the processing of video and/or audio data and which apparatus includes a printed circuit board carrying processing components thereon and the printed circuit board is provided within a housing which has at least one connector of a first format connected to the printed circuit board and to allow the connection of further apparatus thereto and for the transfer of data between said apparatus, and characterised in that there is provided for selective attachment to the connector, an adaptor, said adaptor provided with at least one connector of the first format for connection with the said printed circuit board and at least one further connector of a second format which differs to the first format connector.

[0019] In one embodiment when the adaptor is not connected, the first format connector is exposed externally of the housing for connection with further apparatus.

[0020] In an alternative embodiment, when the adaptor is connected the connector with the second format is exposed externally of the housing for connection with further apparatus.

[0021] In a yet further aspect of the invention there is provided an adaptor for use with electrical apparatus which apparatus includes at least one connector of a first format connected to the printed circuit board and to allow the connection of further apparatus thereto and for the transfer of data between said apparatus, and characterised in that the adaptor is provided with at least one connector of the first format for connection with the said electrical apparatus and at least one further connector of a second format which differs to the first format connector.

[0022] It should be understood that reference to a connector refers to a two part, male and female, connector and that when referred to the adaptor will include one of the parts thereon, male or female, and the apparatus or printed circuit board to which the same is to be connected will include the other of the male or female parts of the connector.

[0023] A specific embodiment of the invention is described with reference to Figures 1 and 2, wherein:-

Figure 1 illustrates an edge of a printed circuit board with adaptor in accordance with one embodiment of the invention; and

Figure 2 illustrates an elevation of the adaptor in accordance with the invention.

[0024] Figure 1 illustrates the edge of a printed circuit board 2 on which a range of components (not shown) are provided and illustrates two 21 pin scart connections 4, 6 one for the connection of a TV and one for a VCR to allow the flow of data between the same via cable connections. The printed circuit board can be provided in data processing apparatus such as, for example, in this embodiment, a broadcast data receiver which is provided to receive and process video and/or audio and/or auxiliary data and the printed circuit board is housed within an outer housing (not shown) which forms the external surface of the apparatus.

[0025] In this embodiment the printed circuit board is shown in an adapted condition wherein there is shown connected to the scart connections 4,6 an adaptor 8, also shown in Figure 2 in elevation. The adaptor is provided with a range of output connectors consisting of non scart format and in this embodiment comprises two Mini Din S-VHS format connectors 9, 10 and six phono format connectors indicated by the reference numeral 12. These output connectors are mounted at the external surface of the apparatus as shown in figure 2 so as to receive the Mini Din S-VHS or phono plug connectors of the said further apparatus. However if the adaptor was not fitted the scart connectors 2,4 would be moved to be exposed for external connection to the other apparatus.

[0026] The connectors 9,10,12 on the adaptor 8 are connected via the adaptor to the respective pins of the scart connectors 4,6 on the adaptor and hence allow connection with the scart connectors of the printed circuit board 2 and hence the apparatus.

[0027] The adaptor 8, which is typically connected into the scart connections 4 and 6 on the printed circuit board 2 and mounted with respect to the apparatus housing so that the connectors 9,10,12 are mounted at right angles thereto, can be used selectively by the apparatus manufacturer. Thus, if the apparatus which includes the printed circuit board 2 is to be used in a market or country where other associated apparatus is always provided with scart connectors, then the adaptor 8 in accordance with the invention need not be used.

[0028] However, if the apparatus is to be provided in a country where connectors other than scart connectors are provided for other forms of apparatus, then the adaptor 8 can be attached to the common printed circuit board. When connected into the scart connections 4 and 6 on the printed circuit board 2 of the apparatus at the time of manufacture the connector outputs 9, 10, 12 as illustrated in Figure 2 are then exposed for the selective attachment of the connectors in the required format thereto, by the user when they purchase the apparatus.

[0029] This therefore means that the assembly of the apparatus at the time of manufacture is simplified, adaptable and so a uniform printed circuit board in the apparatus can be utilised. It also means that when the apparatus is purchased for use in a particular country the correct format connector sockets, either scart con-

nections, or phono or other format connections are presented and exposed, typically at the rear of the apparatus, to allow the connection of the apparatus thereto. The user does not have to choose or have knowledge of connector types as the correct format connector sockets only are presented for use, the decision as whether to use the adaptor 8 or not already having been made by the manufacturer with knowledge of the ultimate destination and connector format used for the apparatus.

[0030] While reference is made to the adaptor having scart connectors for attachment to the printed circuit board and other format connectors for connection to further apparatus it should be appreciated that the adaptor could alternatively have a first connector type, not necessarily scart, for attachment to the printed circuit board and a further connector format, perhaps including a scart connector output for connection with further apparatus to suit specific market requirements.

Claims

1. Electrical apparatus for the processing of video and/or audio data and which apparatus includes a printed circuit board carrying processing components thereon and the printed circuit board is provided with at least one scart connection for the connection of further apparatus thereto and for the transfer of data between said apparatus, and **characterised in that** there is provided for selective attachment to the scart connection, an adaptor, said adaptor provided with at least one scart connector for connection with the said apparatus, and at least one output connection for the selective connection thereto of phono and/or other format connectors, from the said further apparatus.
2. Apparatus according to claim 1 **characterised in that** a common printed circuit board configuration is used for the apparatus.
3. Apparatus according to claim 1 **characterised in that** the apparatus is a broadcast data receiver.
4. Apparatus according to claim 1 **characterised in that** the printed circuit board and adaptor include two or more scart connectors for mutual engagement.
5. Apparatus according to claim 1 **characterised in that** when the adaptor is not attached to the printed circuit board the at least one scart connector of the printed circuit board is exposed externally of the apparatus to allow the attachment of scart connectors thereto by the user.
6. Apparatus according to claim 1 **characterised in that** when the adaptor is attached to the printed circuit board the at least one output is exposed externally of the apparatus to allow the attachment of suitable format connectors thereto.
7. Apparatus according to claim 6 **characterised in that** when attached to the printed circuit board, the adaptor further format connectors are mounted in a plane perpendicular to the printed circuit board.
8. Apparatus according to claim 6 **characterised in that** the adaptor is positioned at the rear of the apparatus.
9. Apparatus according to claim 6 **characterised in that** the printed circuit board and adaptor are mounted within the apparatus housing with the connectors exposed.
10. Apparatus according to claim 1 **characterised in that** the connector includes connector outputs of more than one format.
11. Electrical apparatus for the processing of video and/or audio data and which apparatus includes a printed circuit board carrying processing components thereon and the printed circuit board is provided within a housing which has at least one connector of a first format connected to the printed circuit board and to allow the connection of further apparatus thereto and for the transfer of data between said apparatus, and **characterised in that** there is provided for selective attachment to the connector, an adaptor, said adaptor provided with at least one connector of the first format for connection with the said printed circuit board and at least one further connector of a second format which differs to the first format connector.
12. Electrical apparatus according to claim 11 **characterised in that** when the adaptor is not connected, the first format connector is exposed externally of the housing for connection with further apparatus.
13. Electrical apparatus according to claim 11 **characterised in that** when the adaptor is connected the connector with the second format is exposed externally of the housing for connection with further apparatus.
14. An adaptor for use with electrical apparatus which apparatus includes at least one connector of a first format connected to the printed circuit board and to allow the connection of further apparatus thereto and for the transfer of data between said apparatus, and **characterised in that** the adaptor is provided with at least one connector of the first format for connection with the said electrical apparatus and at least one further connector of a second format

which differs to the first format connector.

5

10

15

20

25

30

35

40

45

50

55

5

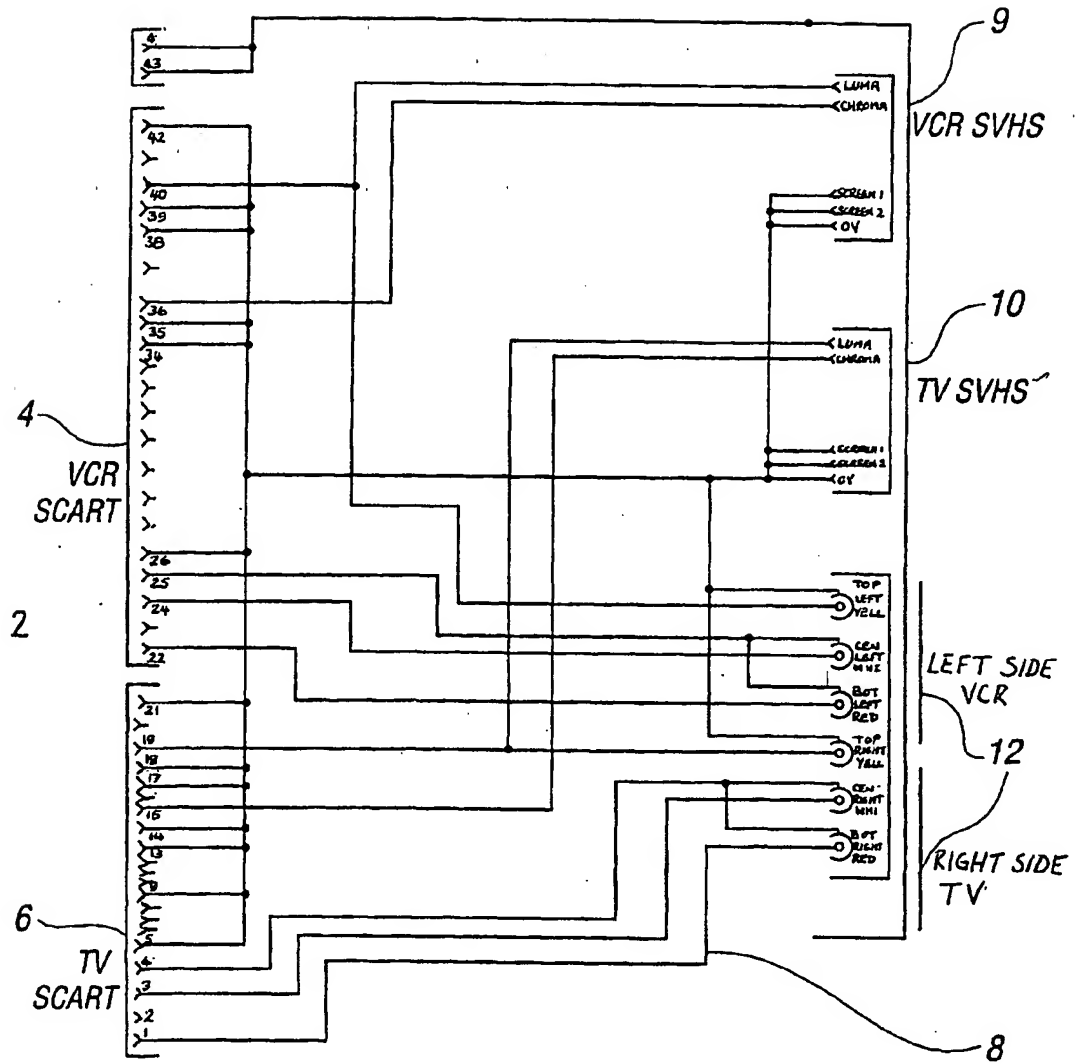


FIG. 1

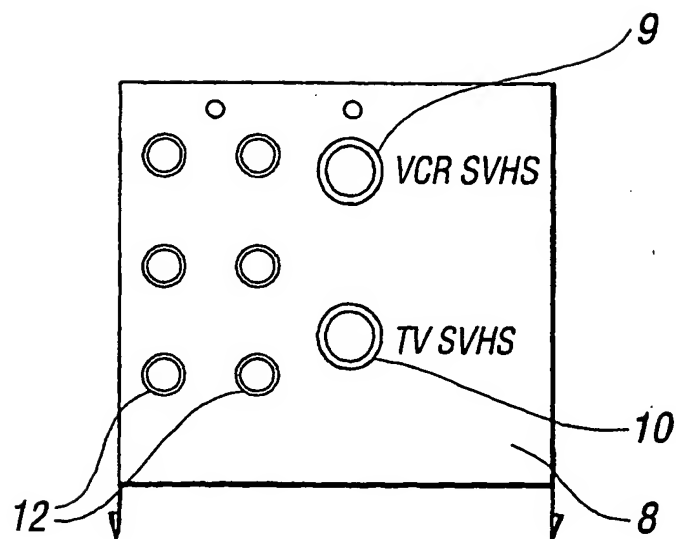


FIG. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 5014

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 789 426 A (PHILIPS ELECTRONICS NV) 13 August 1997 (1997-08-13)	1-3, 6-11,13, 14 4,5,12	H04N5/765 H01R29/00
A	* the whole document * * figures 1-5 * * claim 7 *		
A	--- US 4 777 503 A (KRAEMER LOTHAR) 11 October 1988 (1988-10-11) * the whole document * * figure 2 *	1-14	
A	--- EP 0 854 550 A (SONY CORP) 22 July 1998 (1998-07-22) * column 5, line 1 - column 7, line 42 * * column 13, line 6 - line 39 * * figures 3,4 *	1,11,14	
A	--- FR 2 553 235 A (SANDMANN RODOLPHE) 12 April 1985 (1985-04-12) * page 2, line 41 - line 52 * * figure 5 *	1,11,14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04N H01R
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 4 October 2001	Examiner Didierlaurent, P
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC FORM 1503 (03.02) (P/C/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 5014

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-10-2001

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0789426	A	13-08-1997	FR	2744568 A1	08-08-1997
			EP	0789426 A1	13-08-1997
			JP	9232049 A	05-09-1997

US 4777503	A	11-10-1988	DE	3424931 A1	06-02-1986
			AT	47508 T	15-11-1989
			DE	3573873 D1	23-11-1989
			DK	102586 A	06-03-1986
			WO	8600771 A1	30-01-1986
			EP	0188474 A1	30-07-1986
			FI	860792 A ,B,	24-02-1986
			JP	61502708 T	20-11-1986
			NO	860749 A	28-02-1986

EP 0854550	A	22-07-1998	JP	10208830 A	07-08-1998
			EP	0854550 A2	22-07-1998

FR 2553235	A	12-04-1985	FR	2553235 A3	12-04-1985

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

